



# Perry Fiberglass Products, Inc.

LEADERS IN THE DESIGN AND MANUFACTURING OF DUCTWORK, CARBON ADSORBERS, SCRUBBERS, FANS, PIPING, & TANKS

5415 Village Drive Rockledge, Florida 32955 / PHONE: 321-609-9036 / FAX: 321-609-9003 / www.PerryFiberglass.com

## ALLSORB C-PA 60 MEDIA

## Technical Data Sheet

### About ALLSORB C-PA 60 Media:



ALLSORB C-PA 60 is a highly active Coconut Shell Granular Carbon. Through its unique production process has an extremely high adsorption capacity for hydrogen sulfide and is used in variety of odor control applications within the paper, food, process and waste water treatment industries. The product also has high hardness and low pressure drop characteristics.

### Applications:

- Odor Control
- Industrial and Municipal Waste Water and Sewage Plants
- Paper
- Food
- Process Treatment Facilities
- Gas Processing
- VOC Remediation
- Landfills

### TYPICAL PHYSICAL PROPERTIES / SPECIFICATIONS:

Iodine Number, mg/gm.	1150 - 1250
CCl <sub>4</sub> Activity, Min. (ASTM D-3467)	60
Apparent Density (ASTM D-2854), gm/cc	0.45 - 0.48
	lb/ft <sup>3</sup>
Hardness, Min. (ASTM D-3802)	28 - 30
	98
U.S. Standard Sieve Size	4 x 6, 4 x 8, 4 x 10
Larger than No. 4, Max.	5%
Smaller than No. 6, 8, or 10, Max	5%
Total Surface Area (BET), m <sup>2</sup> /gm	1150 - 1250
Ash, Max (ASTM D-2866)	3%
Moisture, Max. (ASTM D-2867)	2%

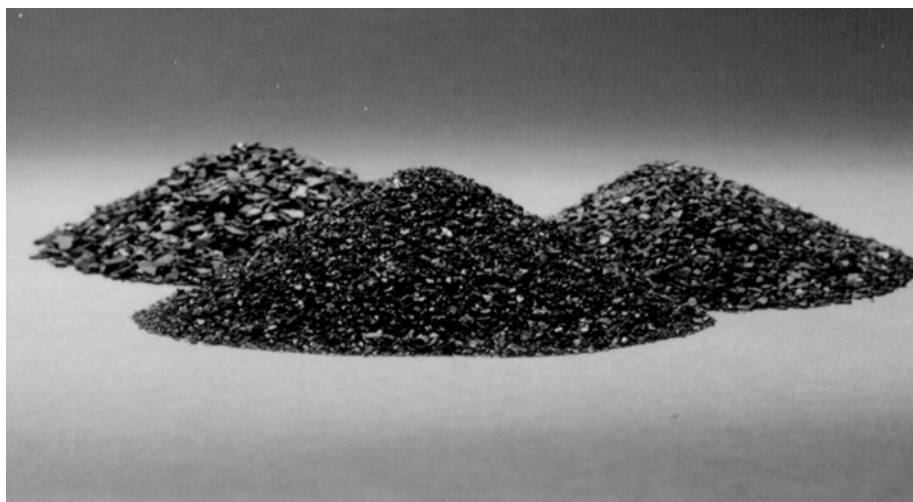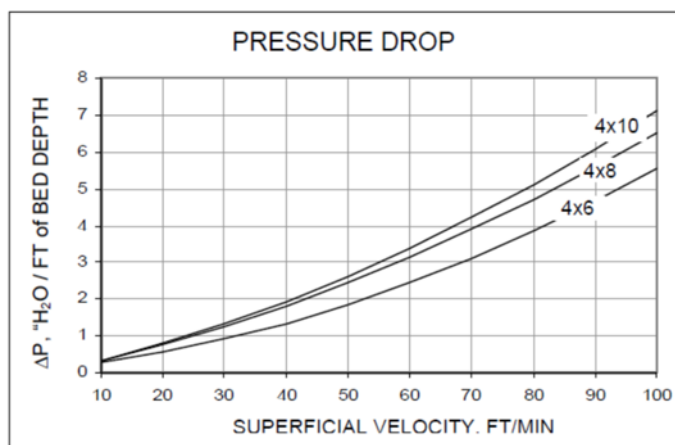

### Product Advantages:

- Extreme Iodine Number.
- Low Ash and Moisture Content.
- Shipped in 55lb and 1,100lb supersacks
- Low cost
- Low dust

PERRY ALLSORB C-PA 60 MEDIA

This information is offered solely for your consideration and verification. It has been gathered from reference materials and/or test procedures and is believed to be true and accurate. None of this information shall constitute a warranty or representation, expressed or implied for which we assume legal responsibility or that the information or goods is fit for any particular use either alone or in combination with other goods or processes.