PERRY FIBERGLASS PRODUCTS, INC.

5415 VILLAGE DRIVE ROCKLEDGE DRIVE, FLORIDA 32955 PH: (321) 609-9036 FAX: (321) 609-9003

TBD	MODEL CD214 FIBERGLASS DAMPER	TBD
TBD		

STANDARD CONSTRUCTION

BLADE
Fiberglass Vinyl Ester Resin.

AXLE
Pultruded Fiberglass, Vinyl Ester Resin.
See table below for diameter.

BEARINGS
Teflon

SIZES
4" - 96"

MAXIMUM TEMPERATURE
150° F.

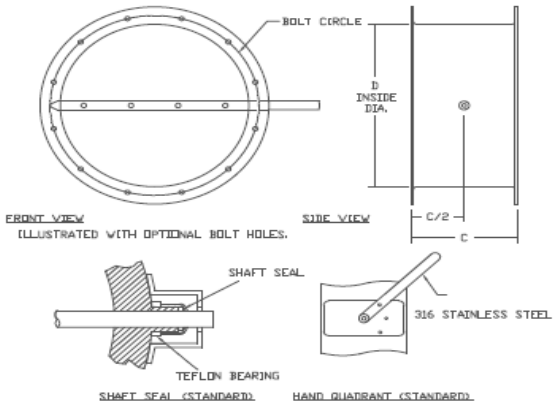

MAXIMUM SYSTEM PRESSURE
+/- 30" W.G.

"D" Inside Diameter	Flange Thickness	Wall Thickness	Blade Thickness	Axle Diameter	"C"
4"-8"	0.25"	0.125"	0.25"	0.75"	12"
10"-12"	0.375"	0.125"	0.25"	1"	12"
14"	0.375"	0.1875"	0.50"	1"	12"
16"-26"	0.50"	0.1875"	0.50"	1"	12"
28"-36"	0.50"	0.25"	0.50"	1"	12"
38"-42"	0.625	0.25"	0.50"	1"	12"
44"-64"	0.625	0.3125"	0.75"	1"	12"
66"-86"	0.625	0.375"	0.75"	1.25"	12"
88"-96"	0.625	0.4375"	0.75"	1.25"	12"

NOTES

1. Handle constructed of 316 SS.
2. Construction based on voluntary standard PS 15-69.
3. All volume dampers have shaft seals as standard.

OPTIONS

FLANGED	X	BLADE SEAL	X	DRILLED FLANGES	

BLADE STOP		ACTUATOR ELECTRIC		ACTUATOR PNEUMATIC	

QUANTITY	DIAMETER	TAG	SPECIAL NOTES

ALL STATED SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.